


LEGEND:

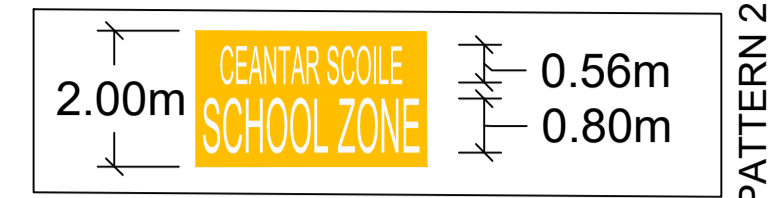

SLOW 1.60m

● PROPOSED PENCIL SHAPED BOLLARD - FLEXIBLE AND REBOUNDABLE (ALTERNATING BLUE/GREEN COLOUR)

○ PROPOSED FLECTA BOLLARD (RUS 002)

● EXISTING 4 No. LIGHTING COLUMN

⊙ PROPOSED DROP KERB

▨ PROPOSED BUFF TACTILE PAVING


▨ PROPOSED RED TACTILE PAVING

▭ SCHOOL BUILDING OUTLINE

FLEXIBLE PENCIL BOLLARDS	44
FLECTA BOLLARDS (RUS 002)	6
FLECTA BOLLARDS	6

NOTE: ALL BOLLARDS WITHIN CARRIAGEWAY ARE TO BE PASSIVELY SAFE.

BOLLARDS TO BE POSITIONED ON THE CARRIAGEWAY 2.0m FROM KERB EDGE WITH 6.5m MINIMUM CARRIAGEWAY WIDTH REMAINING. BOLLARDS TO BE SPACED 2m APART.

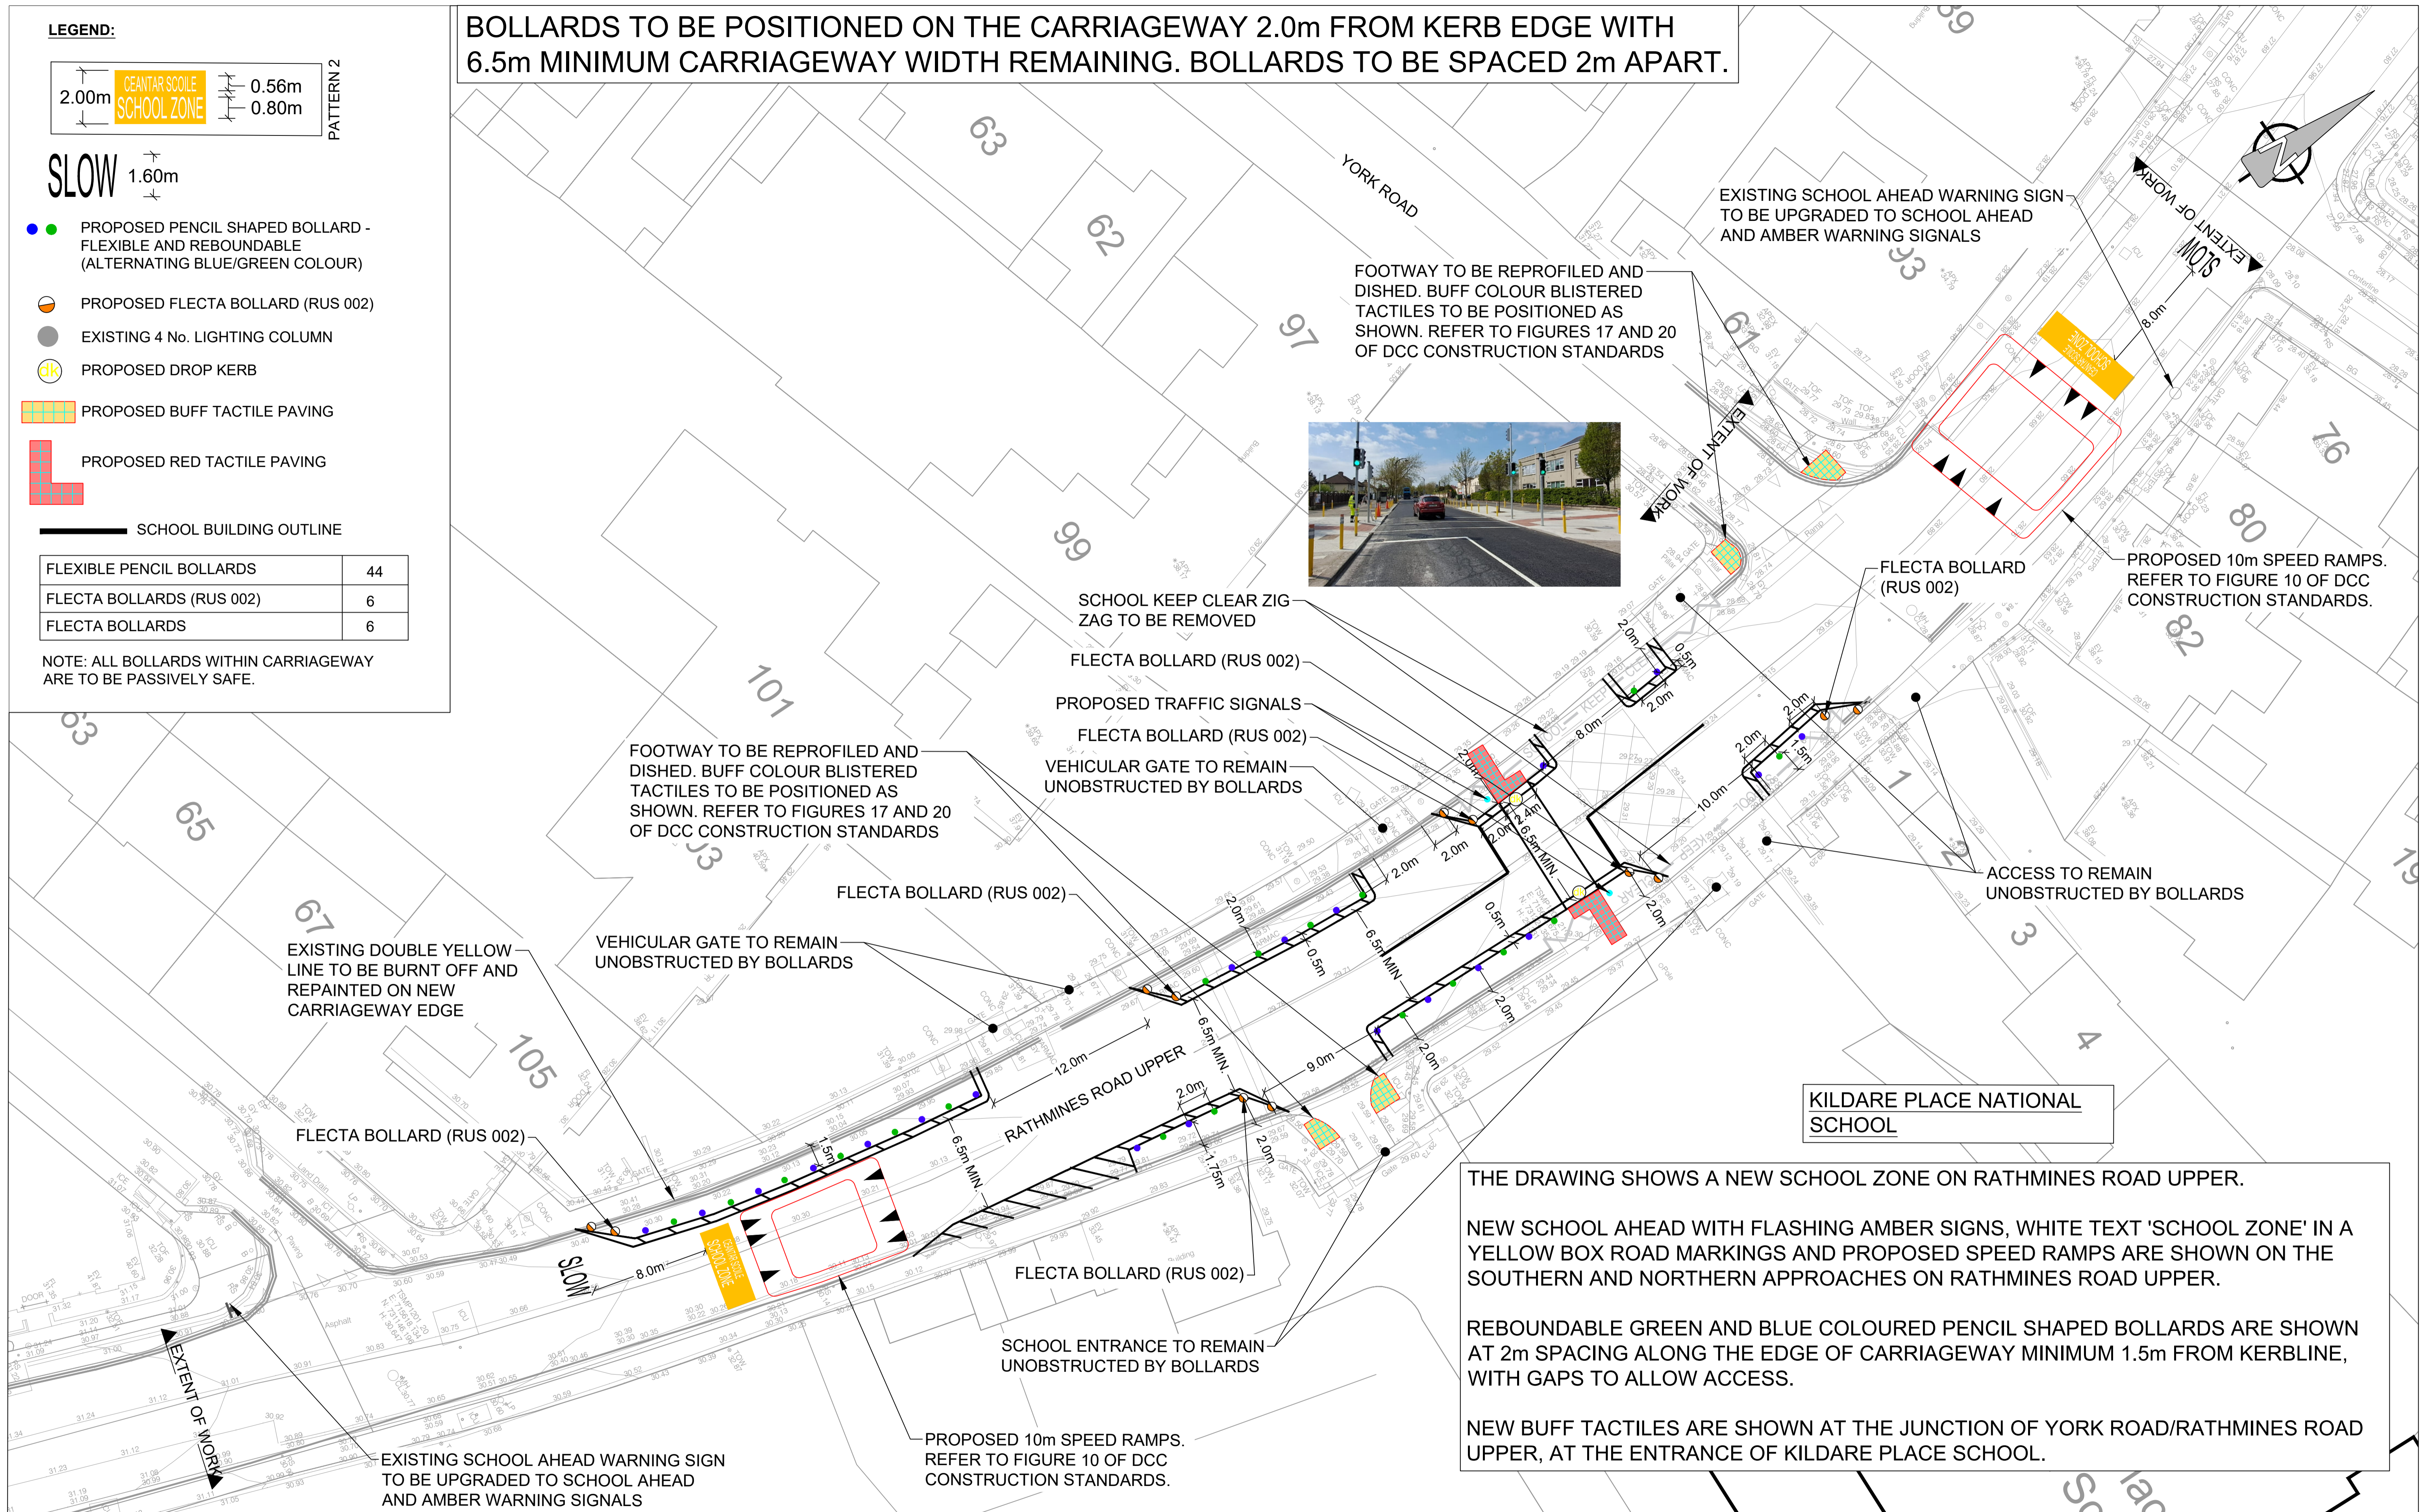

THE DRAWING SHOWS A NEW SCHOOL ZONE ON RATHMINES ROAD UPPER. NEW SCHOOL AHEAD WITH FLASHING AMBER SIGNS, WHITE TEXT 'SCHOOL ZONE' IN A YELLOW BOX ROAD MARKINGS AND PROPOSED SPEED RAMPS ARE SHOWN ON THE SOUTHERN AND NORTHERN APPROACHES ON RATHMINES ROAD UPPER. REBOUNDABLE GREEN AND BLUE COLOURED PENCIL SHAPED BOLLARDS ARE SHOWN AT 2m SPACING ALONG THE EDGE OF CARRIAGEWAY MINIMUM 1.5m FROM KERBLINE, WITH GAPS TO ALLOW ACCESS. NEW BUFF TACTILES ARE SHOWN AT THE JUNCTION OF YORK ROAD/RATHMINES ROAD UPPER, AT THE ENTRANCE OF KILDARE PLACE SCHOOL.

NOTES:

- ALL EXISTING ROAD MARKINGS AND FEATURES SHOWN IN GREY ARE TO BE RETAINED, UNLESS OTHERWISE STATED.
- DESIGN IS BASED ON AVAILABLE ORDINANCE SURVEY MAPPING. EXISTING FEATURES, SUCH AS BUILDOUTS, TRAFFIC ISLANDS, ROAD MARKINGS ETC., WERE ESTIMATED BY THE DESIGNERS BY USE OF AERIAL PHOTOGRAPHY DATA.
- ALL ACCESSES TO BE KEPT UNOBSTRUCTED.
- REVIEW OF EXISTING SERVICES LOCATION & DEPTH HAS NOT BEEN UNDERTAKEN.

DUBLIN CITY COUNCIL
 Comhairle Cathrach Bhaile Átha Cliath
 Environment & Transportation Dept.
 Civic Offices
 Wood Quay, Dublin 8

Brendan O'Brien
 Acting Executive Manager (Traffic)



5	SIGNALISED CROSSING	18/10/2023	ICJ	ED	EOM	Project Title	ORDNANCE SURVEY IRELAND LICENCE No. AR 0064220 ©ORDNANCE SURVEY IRELAND / GOVERNMENT OF IRELAND
4	PHASE 1 & 2 COMBINED	02/05/2023	RO'S	ZC	EOM	DCC SAFE ROUTES TO SCHOOL - KILDARE PLACE NATIONAL SCHOOL - 92/96 RATHMINES ROAD UPPER, DUBLIN 6	
3	REVISED DESIGN	16/12/2022	RO'S	ZC	EOM		
2	REVISED DESIGN	03/11/2022	RO'S	ZC	EOM		
1	REVISED DESIGN	18/10/2022	RO'S	ZC	EOM		
0	INITIAL DESIGN	23/09/2022	RO'S	ZC	EOM		
No.	Revision	Date	By	Chk'd	App'd	Drawing Title	
						PHASE 1 - GENERAL ARRANGEMENT	
	Stage	Date	Date	App'd		Designed: ZC	CAD File:
	PRELIMINARY					Drawn: RO'S	Job No: 60615775-KPS
	APPROVAL					Checked: ZC	Scale: 1:250 @ A1
	TENDER					Approved: EOM	Date: 23/09/2022
	CONSTRUCTION						
							Sheet
							1 OF 1
							Drawing No:
							60615775-ACM-KPS-SK-0101.1
							Rev:
							4